


DHTZ08B Temp&RH Data Logger Manual V1.1

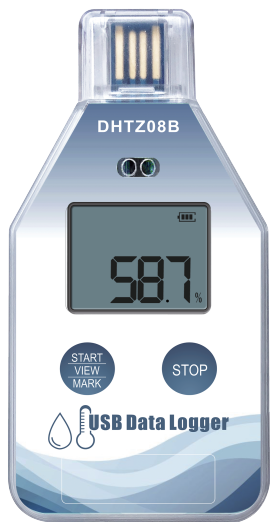

1 Product introduction

Disposable temperature&humidity data logger DHTZ08B is a simple portable device with LCD screen specially designed for cold chain. This product is mainly used to monitor and record the temperature&humidity data of food, medicine, chemical products and other products in the process of storage and transportation. It is widely used in all aspects of warehouse storage and logistics cold chain, such as refrigerated containers, refrigerated vehicles, refrigerated distribution boxes, refrigerated containers, cold storage, laboratory, etc.

Data reading and parameter configuration can be realized through USB interface (which can be configured before use). After inserting into the computer without extra driver needed, CSV and PDF data reports can be generated conveniently and automatically.

2 Technical parameters

Project	Parameter
Measuring Range	Humidity 5%~90%RH, Temp -30 C ~60 C
Accuracy	±5%(10%~90%)RH, ±8%(other)RH;±0.5C (-20~40 C),±1.0 C (other)
Resolution	0.1C
Data Capacity	32000
Usage	Disposable
Start Mode	Button Start or Timed Start
Recording Interval	User configurable (10 seconds to 18 hours)
Start Delay	User configurable (0-254 minutes)
Alarm Range	User configurable
Alarm Type	Single type, cumulative type
Alarm Delay	User configurable (0-254 minutes)
Form of Report	PDF and CSV format data report
Interface	USB2.0 Interface
Protection Level	IP54
Product Size	95.5mm*49mm*7.8mm
Product Weight	25g

3 Factory default parameters of device

Project	Parameter
Temperature Unit	C
Temperature Alarm Limit	< 2 C or > 8 C
Humidity Alarm Limit	<40% RH or>80%RH
Alarm Delay	10 minutes
Recording Interval	10 minutes
Start Delay	30 minutes
Device Time	UTC time
LCD Display Time	1 minute
Start Mode	Press button to start

4 Operating instructions

1 Start recording

Long press the start button for more than 3s until the screen "▶" or the "wait" symbol is on, indicating that the device has successfully started recording.


2 Marking

When the device is in the recording state, long press the start button for more than 3s, and the screen will jump to "mark" interface, mark number plus one, indicating successful marking.

3 Stop recording

Long press the stop button for more than 3s until the "■" symbol on the screen lights up, indicating that the device stops recording.

5 LCD display description

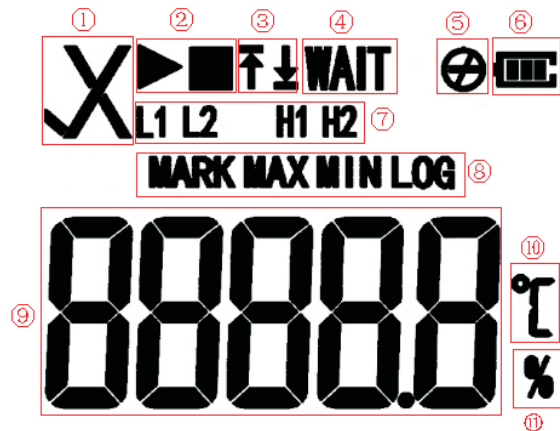

1	√Normal ×Alarm	6	Battery Power
2	▶ In recording status ■ Stop recording status	8	Interface indication
3And 7	Alarm area: ↑ H1 H2 (high temperature&humidity alarm) ↓ L1 L2 (low temperature&humidity alarm)	9	Temperature value Humidity value
4	Start delay status	10	Temperature unit
5	Button Stop Mode invalid	11	Humidity unit

1 Short press the start button to switch the display interface in turn
 Real time temperature interface → Real time humidity interface → Log interface → Mark number interface → Temperature maximum interface → Temperature minimum interface → Humidity maximum interface → Humidity minimum interface.



① Real time temperature interface (initialization state)



② Real time humidity interface (initialization state)



③ Log interface (record state)



④ Mark number interface (record state)



⑤ Temperature max interface (record state)



⑥ Temperature minimum interface (record state)



⑦ Humidity max interface (record state)



⑧ Humidity minimum interface (record state)

6 Description of battery status display

	Capacity
	40%~100%
	15%~40%
	5%~15%
	<5%

Notice :

The battery indication status can not accurately represent the battery power in different low temperature&humidity environment.

7 Computer operation

Insert the device into the computer and wait until the PDF and CSV reports are generated. The computer will display the U disk of the device and click to view the report.

8 Management software download

Download address of the management software for parameters configuration:

<https://dhtme.com/downloads/>

Note: DHTZ08B can be configured only before use